

Meet the BCC300



Dexter Biodiesel Solutions, LLC
TX USA
P: 713.389.8595
M: 713.384.3870
Nathan DeMartino
Nathan@DexterBiodiesel.com
www.DexterBiodiesel.com

There are three (3) housings on the BCC300 unit.
Each housing is referred to as a stage.
So the BCC300 has 3 stages.

The first stage is a prefilter. This is to catch any particulate that may be in the fuel. It also will work as a filter for any “stringy fats” or waxes in the fuel.




1st Stage:
1 housing
1 Prefilter
3 Micron
Part Number: BCC39QPRE

The second stage is a proprietary Cold Clear cartridge. This cartridge is composed of an out side pleated Excellement® filter media. Held within the Excellement® wall is a proprietary media that adsorbs and absorbs polar and non-polar compounds that cause crystallization. In addition it also removes impurities that can have effect on oxidation stability, cold weather precipitation and blending precipitation.



2nd Stage:
1 housing
1 Cartridge
Thin filter Technology with
patented adsorption and absorption
technology
Part Number: BCC39QPOL

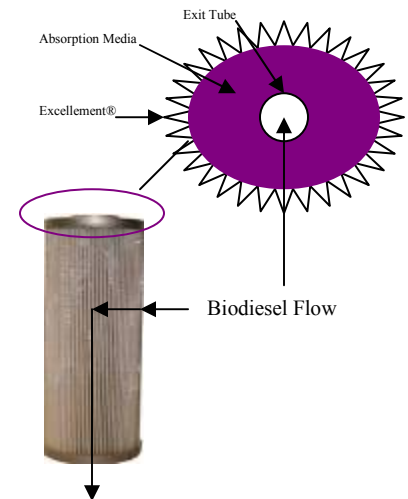

The third stage is a proprietary Cold Clear cartridge. This cartridge is composed of an out side pleated Excellement® filter media. Held within the Excellement® wall is a proprietary media that adsorbs and absorbs polar and non-polar compounds that cause crystallization. In addition it also removes impurities that can have effect on oxidation stability, cold weather precipitation and blending precipitation.



3rd Stage:
 1 housing
 1 Cartridge
 Thin filter Technology with
 patented adsorption and absorption
 technology
 Part Number: BCC39QPOL

To describe the operation simply, the Biodiesel is passed through the Cold Clear system at the end of the production at a temperature of 100°F - 40°F and 15GPM (or less).

Outlet
 2"NPT
 OR
 2" Flange



Inlet
 2"NPT
 OR
 2" Flange

Optional Test ports
 (Pre and Post each
 Stage)

	BCC300
Flow GPM (L/min)	15 (57)
Throughput (gal)	40,000
Max Operating Pressure psi (bar)	50 (4)
Operating Temp °F	70 Optimal Allowable 40-100
Element Case Material	Steel
Porting Base & Cap Material	Ductile Iron
Element Change Clearance- in (mm)	33.8 (859)
PreFilter Cartridge Part Number	BCC39QPRE
Polish Cartridge Part Number	BCC39QPOL
Number of housings per stage	1
Number of Cartridges per Stage	1
Cartridges Case Lot Quantity	1



DEXTER

BIODIESEL SOLUTIONS

Dexter Biodiesel Solutions, LLC
 TX USA

P: 713.389.8595

M: 713.384.3870

Nathan DeMartino

Nathan@DexterBiodiesel.com

www.DexterBiodiesel.com